



AF SERIES - SCALE, TASTE AND ODOR REMOVAL

TECHNICAL DATA

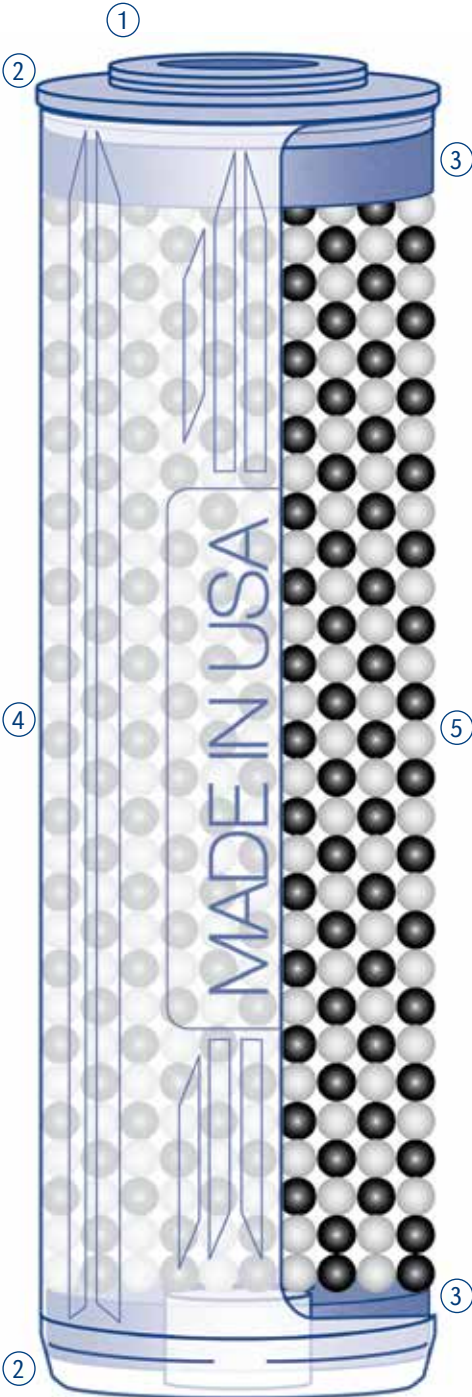

	10" SLIM	20" SLIM	10" SUPER BLUE	20" SUPER BLUE
Diameter (in.)	3.0"	2.9"	4.6"	4.6"
Length (in.)	9.9"	20.0"	10.0"	20.0"
Temperature (°F.)				
Min.	40°	40°	40°	40°
Max	100°	100°	100°	100°
Pressure (psi)				
Min.	20	20	20	20
Max.	125	125	125	125
Micron Rating (µ)	25	25	25	25
Materials of Construction				
1. Gasket	TPE	TPE	TPE	TPE
2. End Caps	PP	ABS	ABS	ABS
3. Pads	PE	PE	PE	PE
4. Body / Tube	PP	ABS	ABS	ABS
5. Media*	ResinTech® Premium MBD-80 Mixed Bed Media			
PP Polypropylene			PE Polyester	
ABS Acrylonitrile Butadiene Styrene			TPE Thermoplastic Elastomer	

MIXED BED DELTA P

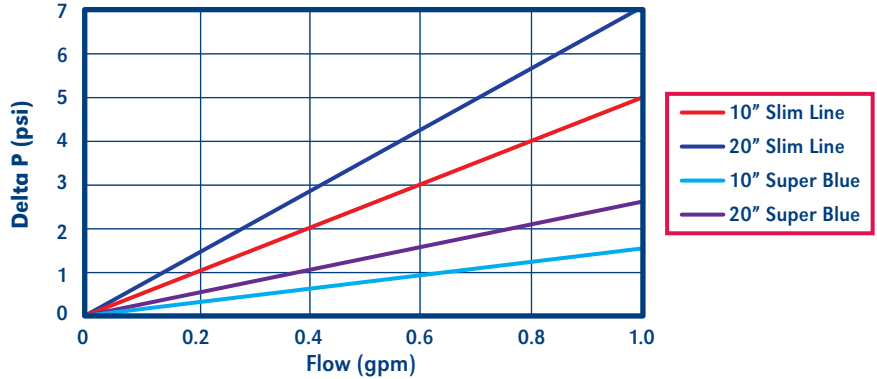

MEDIA

As a division of ResinTech, Inc.®, Aries FilterWorks is the only integrated water filtration media and cartridge manufacturer providing a premium product at the most competitive cost. Aries builds technology and knowledge of ion exchange and specialty adsorbents into each cartridge. Strict quality control over all aspects of cartridge production allows complete traceability of every filter.

ORDERING GUIDE

PART NUMBER	MEDIA	STANDARD HOUSING DIAMETER X LENGTH	MAXIMUM FLOW RATE (GPM)	CAPACITY (GALLONS)
AF-10-4080		2.5" x 10"	0.3	330
AF-20-4080	ResinTech® MBD-80	2.5" x 20"	0.6	600
AF-10-4080-BB	Mixed Bed Media	4.5" x 10"	0.5	680
AF-20-4080-BB		4.5" x 20"	1.5	1,500



COMPONENT

Filter cartridge Certified to NSF/ANSI Standard 42 and NSF/ANSI Standard 61 for material requirement(s) only.
Filter cartridge Certified to NSF/ANSI Standard 372 for low lead compliance.

Notes: Ordering information subject to change without notice. Please verify all specifications prior to ordering.

To place an order call (856) 626-1550 or e-mail ariescs@ariesfilterworks.com

IMPORTANT NOTICE TO USER:

DS-AFTaste/Odor-rev1.6

The following is made in lieu of all other warranties expressed or implied. Manufacturer's and Seller's only obligation shall be to issue credit against the purchase or replacement of the equipment proved to be defective in material or workmanship. Neither Manufacturer nor Seller shall be liable for any injury, loss or damage, direct or indirect, special or consequential, arising out of the use of, misuse, or the inability to use such product. The information contained herein is based on technical data and tests which we believe to be reliable and is intended for use by persons having technical skill at their discretion and risk. Since conditions of use are outside ResinTech's control, we can assume no liability whatsoever for results obtained or damages incurred through the application of the data presented. This information is not intended as a license to operate under, or a recommendation to infringe upon, any patent of ResinTech's or others covering any material or use. The foregoing may not be altered except by written agreement signed by officers of the manufacturer.