# **HARMSCO<sup>®</sup>**

# HCHF

## **Premium Hurricane® Harmsco-Free Cartridges**

**Cellulose Free Media** 

### **Designed for Hurricane® and WaterBetter® Filter Housings**

#### **High Flow Performance**

### Lower Operation Cost with Hurricane® Cartridges

High flow capability
Lower overall operating cost
Reduced waste disposal
Longer filter runs for fewer change-outs
Increased contaminant removal
Operator friendly



#### **Features**

- Fewer cartridges for fewer change-outs and lower maintenance cost
- Pleated synthetic composite filter media provides higher flow rates and lower initial pressure drop
- Pleated surface area provides higher loading capacity for longer filter life and increased particle removal
- End cap, center tube and media are thermally bonded as one integral component for added strength
- Offered in three sizes (40, 90 and 170) and three micron ratings (1, 5, 20) to meet all your high flow requirements

#### **Applications**

- Reverse Osmosis Pre-filtration
- Municipal Drinking Water Filtration
- Commercial/Residential Drinking Water Filtration
- Desalination Pre-filtration
- Industrial Water Filtration

Premium Hurricane® Harmsco-Free Cartridges

- Cooling Tower Filtration
- Chill Water Loop Filtration
- Food & Beverage Filtration
- Marine/Aquatic Filtration
- Water Bottlers





#### **Premium Hurricane<sup>®</sup> Harmsco-Free Cartridges**

#### **Specifications**

and micron ratings.

- Micron Ratings: Nominal micron ratings of 1, 5 and 20
- Center Tubes: ABS or PVC
- End Caps: Pliable PVC with sealing surface built-in
- Filter Media: 100% cellulose-free synthetic composite media
  - **Temperature:** 140°F (60°C) temperature limit\* \* Temperature limits vary and depend on pressure and time under load.

## Certified to NSF/ANSI Standard 61

170


### **Cartridge Selection/Sizing Guide**

**Cleanable/Reusable** in most filtration applications


#### 7-3/4" O.D. For Harmsco<sup>®</sup> Hurricane<sup>®</sup> and WaterBetter<sup>®</sup> Single-cartridge Filter Housings

Cartridge Length	Product Code	Nominal Micron Rating	Media (sq ft)	Recommended Flow Rate* (GPM)	Max Flow Rate* (GPM)	Max Flow Rate* (LPIM)	Max Flow Rate* (M³/HR)	No./ Carton	Carton Size
0 -	Harmsco-l	Free - 1(	)0% cellı	ulose-free syntl	hetic compo	osite media			
9-5/8"	HC/40-1W-HF	1	30	35	50	189	12	1	9x9x11
	HC/40-5W-HF	5	30	35	50	189	12	i	9x9x11
	HC/40-20W-HF	20	30	35	50	189	12	1	9x9x11
19-1/2"	HC/90-1W-HF	1	70	70	100	378	24	1	9x9x21
	HC/90-5W-HF	5	70	70	100	378	24	1	9x9x21
	HC/90-20W-HF	20	70	70	100	378	24	1	9x9x21
30-3/4"	HC/170-1W-HF	1	120	105	150	568	36	1	9x9x32
	HC/170-5W-HF	5	120	105	150	568	36	1	9x9x32
	HC/170-20W-HF	20	120	105	150	568	36	1	9x9x32

\*Harmsco\* recommends operation at 70% of maximum flow rate for optimum performance.



#### Premium Hurricane® Harmsco-Free Cartridges Length and O.D.

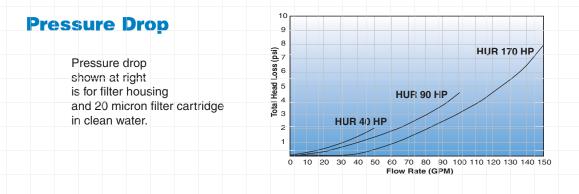

Note: This publication is to be used as a guide. The data within has been obtained from many sources and is considered to be accurate. Harmsco does not assume liability for the accuracy and/or completeness of this data. Changes to the data can be made without notification. Temperature, Pressure, Flow Rates, Differential Pressures, Chemical Combinations and other unknown factors can affect performance in unknown ways. Limited Warranty: Harmsco warrants their products to be free of material and workmanship defects. Determination of suitability of Harmsco products for uses and applications contemplated by Buyer shall be the sole responsibility of Buyer. The end user/installer/buyer shall be liable for the product's performance and suitability regarding their specific intended applications. End users should perform their own tests to determine suitability for each application.

#### HARMSCO<sup>®</sup> Filtration Products

#### www.harmsco.com



7169 49th Terrace North, Riviera Beach, FL 33407 (561) 848-9628 • Toll-free: (800) 327-3248 • Fax: (561) 845-2474 • E-mail: sales@harmsco.com

© Harmsco, Inc. 12/18